Reinsense

PUMP CONTROL

ELECTRONIC PRESSURE CONTROL PS-S*W*F



APPLICATIONS

1.Residential life water supply 2.Underground water
3.tap water pressure increase 4.piping hot water pressure increase
5.hot water heater water supply

FEATURES

- Digital and pressure adjustable
- Water shortage protection
- Unload protection
- Rotor blocking protection
- Anti-frequent start
- Easy to use
- Stable, Smart and Sustainability


PARAMETERS

- Rated voltage: 220V-240V 110V-120V
- Frequency: 50/60Hz
- Max.current: 10 A
- Max.power:1.5kw(220V-240V)
  0.75kw(110V-120V)
- Starting pressure setting: 0-10bar 0-16bar
- Max.working pressure: 10bar
- Connection thread: G1/4 G1/2 G3/8



ELECTRONIC PRESSURE CONTROL

DIMENSIONS

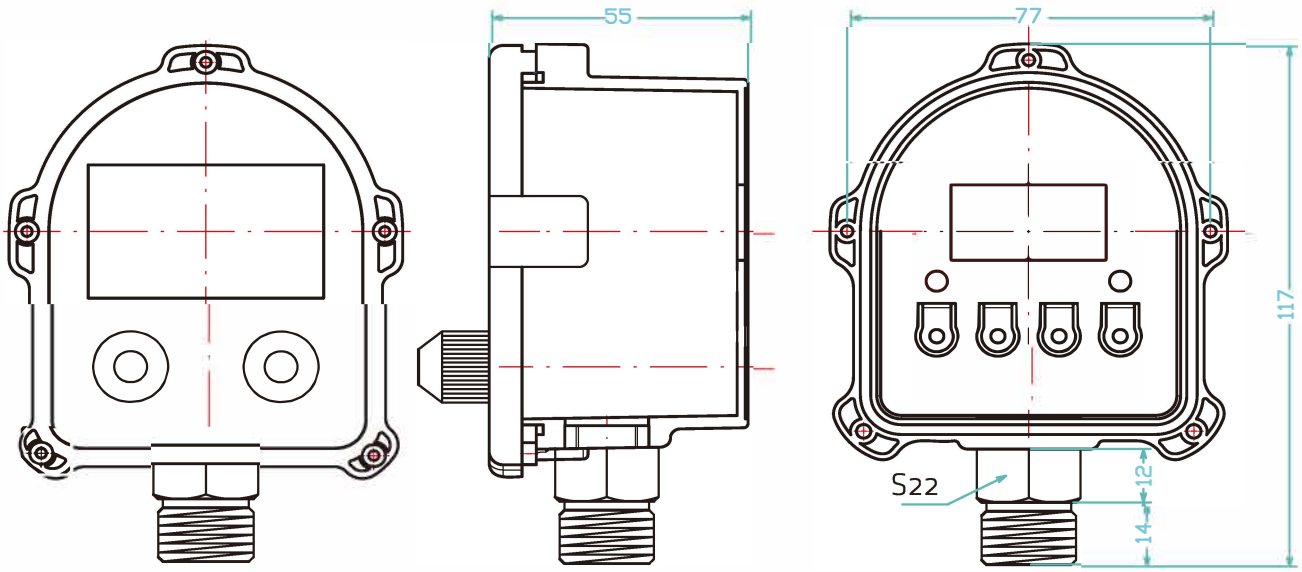

ORDER MARK

PS-	SWF	220	10	Y	M1	XX

Product series

PROGRAM CLASS: SW SWF

RATED VOLTAGE: 24V 110V 220V

PRESSURE RANGE: 10BAR 16BAR

COLOR: **Y** YELLOW **B** BLUE **G** GREEN **O** ORANGE

CONNECTION THREAD: **M1** G1/4 **M2** G1/2 **M3** G3/8

XX CONSUMERS WANT CUSTOMIZATION **none** STANDARD TYPE

SW: WATERLESS PRESSURE AUTOMATIC SETTING

SWF: WATERLESS PRESSURE CAN BE SET SEPARATELY

PS-SWF

